


Resonant Cavity and Perturbation

Setup:

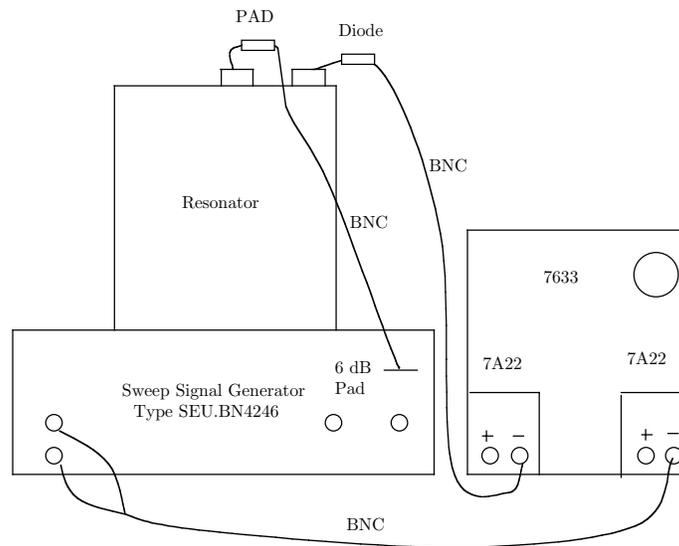

Procedure:

After you get the appropriate display on scope, try to put the signal on center of scope, by adjusting the tuning knob (around 700 MHz).

If you press on the box from the top, the signal move the left, and if you press on it form front and back, it will move to right.